



eForce® Scrubber

26-in and 32-in Ride-On Scrubber



NSS's eForce Scrubber breaks with tradition and delivers an easy to use, easy to operate rider scrubber that's unlike anything you have seen before. Climb on the seat and point the joystick where you want to go. With no effort whatsoever, the eForce Scrubber takes you there. And, tight turns are no problem for the eForce Scrubber. It can turn on a dime thanks to its unique joystick control.

- Excellent visibility of work areas.
- Training is easy. A training manual is built into the touch screen control panel.
- Dial in exactly what you need for your application. Three solution flow rates, three pad pressures, two pad speeds and two vacuum speeds give you the flexibility you need to maximize your productivity and run time.
- Conservation Mode – Set the eForce Scrubber to the lowest water and power settings. At 62 decibels, it is perfect for cleaning areas where quiet operation and water conservation is needed. As an added benefit, in conservation mode, the eForce Scrubber can scrub for up to five hours.

NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com



Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

eForce Scrubber Specifications

Cleaning Path

eForce Scrubber 26	26 in (66 cm)
eForce Scrubber 32	32 in (81 cm)

Brush Motors

Power (HP)	0.75
Brush Speed (RPM)	150 or 225
Brush Pressure (lbs)	70, 110, 150 (eForce Scrubber 26) 80, 120, 160 (eForce Scrubber 32)

Vacuum Motor

Type	2-stage tapered fan
Power (HP)	0.60
Water Lift (in)	61
Air Flow (CFM)	78

Solution Pump

Power (HP)	0.125
Flow Rates (GPM)	0.35, 0.70, 1.00

Drive System

Drive Motor (HP)	0.33
Drive Speed	Up to 500 ft/min; top reverse 40% forward speed
Drive Wheel	12-in x 4-in, non-marking rubber with slip resistant tread

Batteries (Runtime)	Four 6V 235 AH (3.2 hours)
	Four 6V 350 AH (4.3 hours)
	Four 6V 220 AH AGM (3.0 hours)
	Four 6V 330 AH AGM (4.0 hours)

Construction

Solution Tank (gal)	25 (94 L)
Recovery Tank (gal)	27 (102 L)

Dimensions


Length (in)	56.5 (143 cm)
Width (in)	eFS 26: 27 in (69 cm) eFS 32: 33 in (84 cm)
Height (in)	54 (137 cm)

Sound Level 62 – 67 dBA, depending on settings

Weight (lbs)	Model	220 AH	235 AH	330 AH	350 AH
	26	873	905	1,081	1,057
	32	883	915	1,091	1,067

Productivity (ft² /hr) 26" - 35,800 Theoretical, 16,600 Practical
32" - 44,100 Theoretical, 20,400 Practical

Warranty 3 years limited, 10 year for tanks

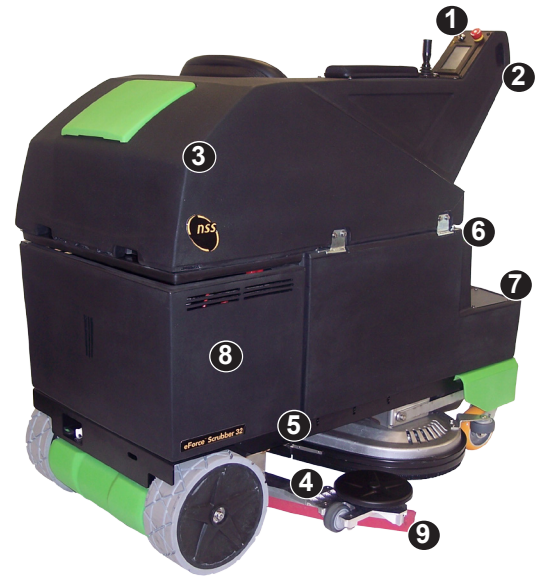

- 1 Touchpad control lets the operator work all of the controls from one screen.
- 2 Supervisor Mode allows you to limit machine operation to only the settings you want available.
- 3 Recovery Tank is easily accessible for thorough cleaning.
- 4 Squeegee swings directly behind the scrub deck to allow for solution pickup even in the tightest turns.
- 5 Heavy-duty 7-gauge steel frame.
- 6 A smart solution pump system varies the solution flow rate based on the machine speed delivering exactly the right amount of solution to the floor.
- 7 Optional chemical metering system allows precise dosing of cleaning chemicals to eliminate overuse.
- 8 Side-loaded battery compartment makes battery installation easier.
- 9 No tools are required to change the squeegee blades.



The upper body opens fully allowing ample space for cleaning out the recovery tank.



A removable filter captures debris before it can clog the recovery tank drain.



Wide-open access to the battery compartment makes filling batteries simple.



Conservation Mode: With one button press, the eForce Scrubber is set to the lowest water and power settings. Perfect for cleaning areas where quiet operation and water conservation is needed.



NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, OH 43607-2958
USA

P: (800) 677-1663
F: (419) 531-3761
mailto:mailus@nss.com
www.nss.com

Specifications subject to change without notice.

DISTRIBUTED BY